


S1 AND S2 ARE THE PORT SELECT LINES FOR CONNECTION TO THE MOUSETARI CHIP.

+5V AND GND WILL BE PROVIDED BY THE 1088XEL VIA IT'S MOUSE SELECT HEADER (J14).

THE PIC12F629 IS TO BE PROGRAMMED IN-CIRCUIT.

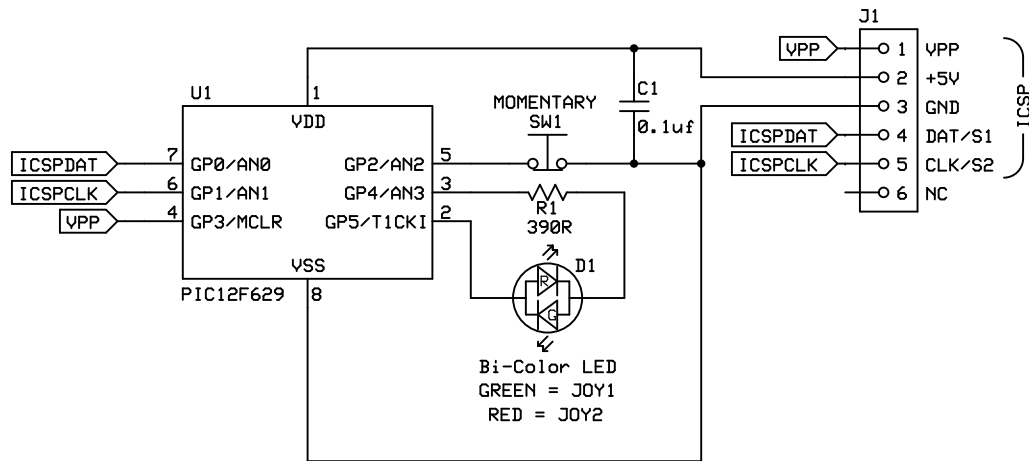

### PARTS LIST

U1	PIC12F629	P/N PIC12F629-I/P-ND
R1	390 OHM	P/N 390QBK-ND
C1	0.1uF	P/N 1109PHCT-ND
SW1	TACTILE SWITCH	P/N SW406-ND
D1	T1 RED/GRN LED	P/N 754-1751-ND
J1	Rt-Angle 1x6M	P/N S1111EC-06-ND

\*NOTE: ALL PART NUMBERS ARE FROM DIGIKEY.COM, UNLESS OTHERWISE MARKED

<b>MYTEK CONTROLS</b>		
<b>XEL MOUSE PORT SELECT BOARD</b>		
MSP	Rev 1.2 11/14/2017	Page 1 of 1